



# ULTIMATE POWER SOLUTION (FZC)

The world's best dealer on Diesel Power Generation, Control Systems & Power Solution

POWERED BY



CERTIFIED BY



## 1000KVA

3 PHASE

## 50Hz

### GENERATING SET MODEL UPS P 1000

#### Output Ratings

380-415 V, 3 ph, 50 Hz, 1500 rpm

#### Prime

1000 KVA

800 KW

#### Standby

1050 KVA

840 KW

380-415 V, 3 ph, 60 Hz, 1800 rpm

1075 KVA

860 KW

1100 KVA

880 KW

### ENGINE/ TECHNICAL DATA

Ratings at 0.8 Power Factor

Engine Make

PERKINS

Engine Model

4008-TAG2A

Governing Type

Electronic

Number of Cylinders

8

Cylinder Arrangement

Vertical in line

Bore and Stroke mm

160 X 190

Displacement/ Cubic Capacity litres

30.561

Induction System

Direct Injection

Cycle

4 stroke

Combustion System

Direct Injection

Compression Ratio

13.6:1

Frequency and Engine Speed

50Hz & 1500rpm

60Hz & 1800rpm

Gross Engine Power kW(hp)

719(964)

719(964)

Fuel Consumption @50% load L/hr

206

206

@75% load L/hr

203

203

@100% load L/hr

205

205

Total Lubrication System Capacity litres

153

153


Total Coolant Capacity (inc. radiator) litres

162

162

Exhaust Temperature: °C

Image is for illustrative purpose only

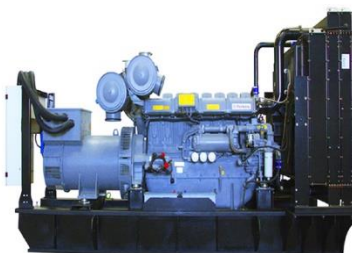

## 1100KVA

## 60Hz

3 PHASE

### ALTERNATOR DATA

Make

UPS/ Leroy Somer

Model

UPS404G/ (TAL) 49E

No. of Bearings

1

Insulation class

H

Wires

6/12

Ingress Protection

IP23

Excitation System

Shunt

Winding Pitch

2/3

Overspeed

2250 mn<sup>-1</sup>

Voltage Regulation (steady)

±1%

### CONTROL PANEL

Make

DeepSea

Model

7000 Series

The DSE 7000 series is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.

#### Metering and Alarm Indications:

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L-L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency
- Charge fail
- Low DC Voltage
- CAN diagnostics and CAN fail/error

Tel : +971 6 5570722  
Fax : +971 6 5570733

P.O.BOX : 122333 F3-18, Sharjah Airport Free Zone (SAIF ZONE)

E-mail : info@upsgenerator.com  
Web. : www.upsgenerator.com

# STANDARD SPECIFICATIONS

## 1000KVA

3 PHASE

## 50Hz

### 1. ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

### 2. ENGINE FILTRATION SYSTEM

- Cartridge type dry air filter.
  - Two cartridge type fuel filter.
  - Full flow lube oil filter.
- All filters have replaceable elements.

### 3. COOLING RADIATOR

Radiator and cooling fan, complete with safety guards designed to cool the engine at high ambient temperatures (consult your dealer for de-rating factors)

### 4. EXHAUST SYSTEM

Exhaust gas flow 31..3 (m3/min)  
Maximum allowable back pressure 18.0 (kPa)

### 5. CIRCUIT BREAKER TYPE

3 pole MCCB. (4 pole is optional)

### 6. FUEL SYSTEM

The baseframe design is incorporated with an integral fuel tank with a capacity of approx.. 8 hours running at Full load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and the drain plug.

### 7. ALTERNATOR

#### 7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermoset-Ting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection Against moisture or condensation.

#### 7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains

The Voltage Regulation at  $\pm 1\%$ . Nominal adjustment by means of a trim pot incorporated on the AVR.

### 8. MOUNTING ARRANGEMENT

#### 8.1 COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

#### 8.2 ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine/Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

#### 8.3 SAFETY GUARDS

The Fan & Fan Drive along with the battery Charging Alternator are Safety Guard protected for personnel protection.

## 60Hz

## 1100KVA

3 PHASE

### 9. FACTORY TEST

- The Generating set is load tested before dispatch
- All protective device control functions and site load conditions are simulated. The generator and its systems are checked before dispatch.

### 10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

### 11. DOCUMENTATION

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning/ Fault Finding instruction leaflets are accompanied with the Generator.

### 12. QUALITY STANDARDS


The equipment meets the following standards, BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.

### 13. WARRANTY

All of the Generating sets are covered under a warranty policy For a period of 12 months or 1000 working hours. Warranty of the equipment is in line with manufacturers warranty terms & conditions. (check warranty statement for more details, as it may vary for different countries.)  
In line with the continuous product development, we reserve The right to change specifications without notice.

## STANDARD GENERATOR DIMENSION AND WEIGHT

### Silent Type ( with Soundproof Canopy)

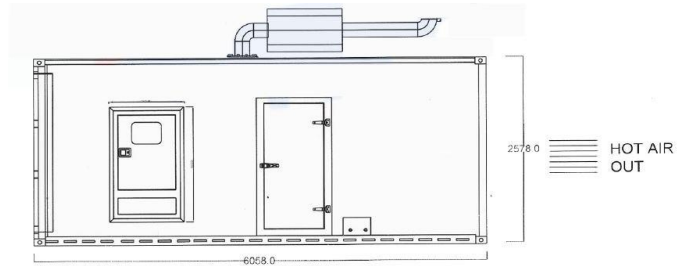

### Open Type ( without Soundproof Canopy)

