

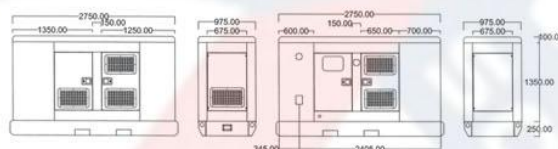
**TC175L**

Standby power : 175KVA/140KW

Prime power : 160KVA/128KW

Standard features

- Engine : CUMMINS , 6CTA8.3-G2
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROYSOMER , LSA44.2 L12
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

**Weight and Dimensions**

GEN-SET	Dimensions (L X W X H)	Weight
Open type	2350mm X 860mm X 1500mm	1549Kg
Silent type	2750mm X 975mm X 1700mm	2299Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	250	175/140	160/128

Engine Data

Manufacturer/Model	CUMMINS 6CTA8.3-G2 4-cycle
Cylinder /Arrangement	6 / L
Displacement	8.3 L
Bore and Stroke	102 mm × 120 mm
Compression ratio	17.3 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	180 KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	530 L/S
Exhaust temperature	553°C
Max back pressure	10.2KPa

**Fuel System**

Fuel consumption 100% (of the Prime Power)	33 L / h
--	----------

Oil system

Total oil capacity w/filters	24L
------------------------------	-----

Air intake

Engine air flow	140L/ s
-----------------	---------

Coolant System

Radiator & engine capacity	35 L
Max water temperature	105°C
Thermostat	82-94°C

Generator Data

Manufacturer / Type	LEROYSOMER / LSA44.2 L12
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

Control panel**Specifications :**

Frequency meter , Ammeter , Voltmeter , Alarms and faults
Oil pressure , water temperature , No start-up , Overspeed ,
Min/max battery voltage , Low fuel level , Emergency stop

Engine parameters:

Hours counter , Oil pressure , water temperature